


Rec'd PCT/PTO 24 JAN 2005

10/522266
PCT/GB 2003/003301



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

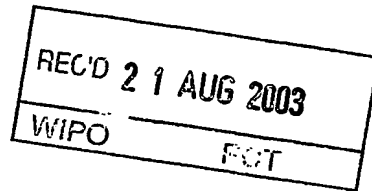


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

BEST AVAILABLE COPY

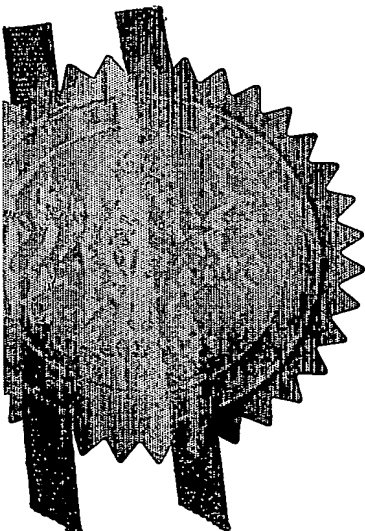

Signed

H. Behen

Dated


25 June 2003

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Patents 1977
(Rule 16)

Request for grant of a patent

(See the notes on the back of this form. You can also see an explanatory leaflet from the Patent Office to help you fill in this form)

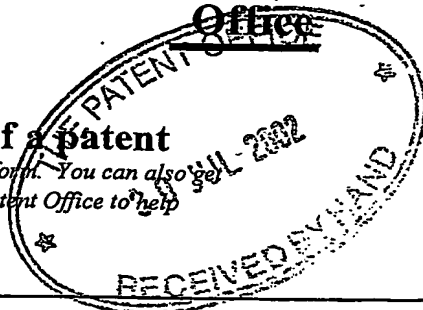

The Patent Office

Concept House
Cardiff Road
Newport
South Wales NP10 8QQ

1.	Your reference	AWP/60449/000		
		31JUL02 E737258-6 D02882 P01/7700 0.00-0217642.8		
2.	Patent application number (The Patent Office will fill in this part)	0217642.8		
3.	Full name, address and postcode of the or of each applicant (underline all surnames)	LOTUS CARS LIMITED HETHEL, NORWICH NORFOLK NR14 8EZ		
	Patents ADP number (if you know it)			
	If the applicant is a corporate body, give the country/state of its incorporation	UNITED KINGDOM	5739743001	
4.	Title of the invention	AN ELECTRICALLY OPERATED VALVE FOR CONTROLLING FLOW OF HYDRAULIC FLUID		
5.	Name of your agent (if you have one)	BOULT WADE TENNANT		
	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	VERULAM GARDENS 70 GRAY'S INN ROAD LONDON WC1X 8BT		
	Patents ADP number (if you know it)	42001		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day/month/year)
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day / month / year)
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 7

Claim(s) 4

Abstract 0

Drawing(s) 2 1 2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) 1

Any other documents
(Please specify)

11

I/We request the grant of a patent on the basis of this application.

Signature

Date

30 July 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr. A.W. Pluckrose
020 7430 7500

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

- 1 -

AN ELECTRICALLY OPERATED VALVE FOR CONTROLLING FLOW OF HYDRAULIC FLUID

5 The present invention relates to an electrically
operated valve for controlling flow of hydraulic
fluid.

10 The present invention will be discussed with
particular reference to the use of valves for
controlling flow of hydraulic fluid to actuators
attached to engine valves of an internal combustion
engine. It has often been suggested in the past that
in an internal combustion engine a mechanical cam
shaft could be replaced by a series of hydraulic
15 actuators which would open and close the engine valve.
The hydraulic actuators are controlled by controlling
the flow of hydraulic fluid to them. Various
different arrangements of valves have been proposed
for the control of hydraulic fluid. However, there is
20 still a need for a simple and cost-effective valve
arrangement and this issue is addressed by the present
invention.

25 The present invention provides an electrically
operated valve for controlling flow of hydraulic fluid
comprising:

- a valve housing;
- a spool slidable in a spool chamber in the valve
housing;
- 30 a first fluid conduit extending through the valve
housing for connecting the spool chamber with a source
of pressurised fluid;
- a second fluid conduit extending through the
valve housing for connecting the spool chamber with a
35 reservoir of fluid; and

a third fluid conduit in communication with the spool chamber which delivers fluid to or receives fluid from apparatus which uses the hydraulic fluid flow controlled by the valve; wherein:

5 the spool is biased to a rest position by a pair of opposed springs;

10 the spool in the rest position thereof closes off the first and second fluid conduits from the spool chamber and thereby prevents flow of fluid to and from the third fluid conduit;

15 the valve has a first electric coil which surrounds a first end of the spool and which can be activated to displace the spool from the rest position thereof to open the first fluid conduit to the spool chamber, whilst keeping closed the second fluid conduit, and thereby to allow pressurised fluid to flow from the first fluid conduit to the third fluid conduit; and

20 the valve has a second electric coil which surrounds a second end of the spool and which can be activated to displace the spool from the rest position thereof to open the second fluid conduit to the spool chamber, whilst keeping closed the first fluid conduit, and thereby to allow fluid to flow from the third fluid conduit to the second fluid conduit.

A preferred embodiment of the present invention will now be described with reference to the accompanying drawings in which:-

30 Figure 1 is a schematic illustration of an electrically operated valve for controlling flow of hydraulic fluid according to a preferred embodiment of the present invention;

35 Figure 2 is a schematic illustration of how the valve of Figure 1 could be used in an internal combustion engine.

Turning first to Figure 1 there can be seen an electrically operated valve 10 controlling the flow of hydraulic fluid therethrough. The valve 10 comprises a valve housing 11 having slidable therein a spool 12, the spool being slidable in a spool chamber 13 provided in the valve housing 11.

A first fluid conduit 14 extends through the valve housing 11 and connects the spool chamber 13 with a source of pressure.

A second fluid conduit 15 extends through the valve housing 11 and connects the spool chamber 13 with a return line for returning hydraulic fluid to a reservoir.

A third fluid conduit 16 connects the valve 10 to whatever apparatus receives the flow of hydraulic fluid controlled by the valve 10.

In Figure 1 there can be seen two opposed springs 17 and 18 which together act to centre a spool 12. When the spool 12 is centred both springs will still be compressed and will still each apply a force on the spool 12, but the forces applied by the two springs 17 and 18 will be equal and opposite.

Two electric coils 19 and 20 surround the ends of the spool 12. Surrounding each end of the spool 12 there is provided armature 21 and 22.

The spool 12 is surrounded by a sleeve 23. This sleeve 23 has two annular end surfaces 24 and 25. The annular end surface 24 faces an annular end surface 26 of the armature 21. The annular surface 25 faces an

annular surface 27 of the armature 22.

5 When the electric coil 20 is actuated then the magnetic circuit acts to draw the armature 22 into engagement with the annular surface 25 of the sleeve 23. Thus, the spool valve is moved to the right of its position shown in Figure 1, against the biasing force of the spring 18.

10 When the electric coil 19 is activated then the magnetic field generated by the coil acts to draw the armature 21 towards the annular surface of the sleeve 23 and thereby move the spool 12 to the left of its position in Figure 1, against the biasing force of
15 the spring 17.

20 With the spool 12 positioned as shown in Figure 1 the pressure line 14 and the return line 15 are both sealed off from the spool chamber 13 and therefore no hydraulic fluid can flow to or from the fluid conduit 16.

25 When the spool 12 is moved to the right of its position in Figure 1 then the fluid conduit 16 is connected via the spool chamber 13 with the return line 15 and therefore fluid can flow from the line 16 through the spool chamber 13 to the fluid conduit 15 and thereby to a reservoir of hydraulic fluid.

30 When the spool 12 is moved to the left of its position in Figure 1 then the conduit 14 is opened to the spool chamber 13 whilst the conduit 15 remains sealed. Thus, pressurised fluid can flow through the conduit 14 to the conduit 16 via the spool chamber 13.

The fluid conduit 16 is permanently open to the spool chamber 13.

In Figure 1 there can be seen a null adjust
5 mechanism 28. This comprises an externally threaded
rotatable screw 50 provided in a threaded bore 51 in
the valve housing 11. A hexagonal socket 52 is
provided at the tip of the screw 50 and can be engaged
and rotated by an Allen key. An eccentric cam 53
10 extends downwardly from the screw 50 and acts on a
reaction surface provided on the sleeve 23. On
rotating the cam 53 it is possible to slide the sleeve
23 within the valve housing 11. This can be done to
ensure that when the two electric coils 19, 20 are
15 deactivated and the spool 12 brought to a central
position by the two springs 17 and 18, then the ports
in the sleeve 23 via which the pressure line 14 and
the return line 15 open onto the spool chamber 13 are
both closed off by the spool 12.

20
By having a high pre-load applied on the spool 12
in its resting position by both the spring 17 and the
spring 18, with the forces applied by the springs
cancelled out by each other, it is possible to set a
25 low spring rate and to determine how much force must
be applied to move the spool valve 12 from its
centralised position. This feature allows the valve
to be used easily as a metering valve, because the
current flowing through each of the electrical coils
30 20 or 21 can be adjusted to give a variable
displacement of the valve spool 12, a variable degree
of opening of the ports in the sleeve 23 and therefore
a variable rate of flow through the valve 10.
However, if wished, the valve 10 could operate as a
35 switching valve, moving only between extreme positions

by applying high value square-wave signals to the coils 19 and 20.

5 Moving now to Figure 2, the valve 10 can be seen represented schematically. The pressure line 14 is shown connected to a pump 30 and the return line 15 is shown connected to a reservoir 31. The line 16 is shown connected to an actuator 32. The actuator 32 comprises a piston 33 movable in a cylinder defined by
10 a sleeve 34. Piston 33 and the sleeve 34 define together a variable volume chamber 35 which receives hydraulic fluid via the line 16.

15 A position sensor 36 is built into the sleeve 34 and provides a feed back signal to an electronic controller 37. The electronic controller 37 uses the feedback signal along with other received parameters to provide a control signal which is relayed to the valve 10. As explained before, the control signal will
20 be used to apply a current to one of the two coils 20 and 19.

When the actuator 32 is connected to the pump 30 via the valve 10 then the piston 33 is caused to move
25 downwardly and to open an engine valve 40 of an internal combustion engine, (e.g. an inlet or an exhaust valve).

When the actuator 32 is connected to the
30 reservoir 31 via the valve 10 then a valve spring 41 acting on the engine valve 40 can force the piston 33 to reduce in volume the chamber defined between piston 33 and sleeve 34, with the dispelled fluid being relayed via the valve 10 to the reservoir 31.

The rate of opening of the valve 40 and the rate of closing of the valve 40 can be controlled by controlling the rate of flow of fluid through the valve 10.

5

The electronic controller 37 is part of a closed-loop feedback system which controls the position of the engine valve 40. The electronic controller 37 will send a demand signal to the valve 10 in the expectation that this will result in a position (and perhaps a rate of change of position) of the piston 33 and therefore the engine valve 40. The displacement transducer 36 will provide a signal which can be used to generate an error signal so that the electronic controller 37 can adjust the control signal it sends to the valve 10.

The use of feedback signal is important since the provision of a closed loop feedback system can provide for adaptive control, with the electronic controller making adjustments during the life of an engine to account for wear of components in the engine.

20

CLAIMS

1. An electrically operated valve for controlling flow of hydraulic fluid comprising:

5 a valve housing;
a spool slidable in a spool chamber in the valve housing;

a first fluid conduit extending through the valve housing for connecting the spool chamber with a source
10 of pressurised fluid;

a second fluid conduit extending through the valve housing for connecting the spool chamber with a reservoir of fluid; and

a third fluid conduit in communication with the
15 spool chamber which delivers fluid to or receives fluid from apparatus which uses the hydraulic fluid flow controlled by the valve; wherein:

the spool is biased to a rest position by a pair of opposed springs;

20 the spool in the rest position thereof closes off the first and second fluid conduits from the spool chamber and thereby prevents flow of fluid to and from the third fluid conduit;

the valve has a first electric coil which
25 surrounds a first end of the spool and which can be activated to displace the spool from the rest position thereof to open the first fluid conduit to the spool chamber, whilst keeping closed the second fluid conduit, and thereby to allow pressurised fluid to
30 flow from the first fluid conduit to the third fluid conduit; and

the valve has a second electric coil which
surrounds a second end of the spool and which can be
activated to displace the spool from the rest position
35 thereof to open the second fluid conduit to the spool

chamber, whilst keeping closed the first fluid conduit, and thereby to allow fluid to flow from the third fluid conduit to the second fluid conduit.

5 2. An electrically operated valve as claimed in claim 1 wherein the pair of opposed springs each apply a force on the spool when the spool valve is in the rest position thereof.

10 3. An electrically operated valve as claimed in claim 1 or claim 2 wherein a sleeve surrounds the spool and defines the spool chamber in which the spool is slidable, the sleeve having a first port through which the first fluid conduit communicates with the
15 spool chamber, a second port through which the second fluid conduit communicates with the spool chamber and a third port through which the third fluid conduit communicates with the spool chamber, and wherein the valve has an adjustment mechanism for sliding the
20 sleeve relative to the valve housing.

4. An electrically operated valve as claimed in claim 3 wherein the adjustment mechanism comprises a rotatable cam which engages a reaction surface
25 provided on the sleeve.

5. An electrically operated valve as claimed in any one of the preceding claims wherein the spool has mounted thereon an armature surrounding the first end
30 of the spool and displaceable with the first electric coil and the spool has mounted thereon an armature surrounding the second end of the spool and displaceable within the second electric oil.

35 6. A method of operating the electrically operated

valve claimed in any one of the preceding claims, the method comprising:

5 selecting between the first and second coils and activating the first electric coil when pressurised fluid is to be relayed on to the apparatus using the hydraulic fluid flow and activating the second electric coil when fluid is to be returned from the apparatus using the hydraulic fluid flow back to the reservoir; and

10 controlling the current through and/or voltage across each electric coil when activated in order to control rate of flow of fluid through the valve.

7. An engine valve operating system comprising:

15 an actuator which acts on an engine valve and can be extended to open the engine valve and retracted to allow the engine valve to close under the action of an engine valve spring;

20 an electrically operated valve as claimed in any one of the preceding claims controlling flow of hydraulic fluid to and from the actuator; and

 an electronic controller for controlling the actuator.

25 8. An engine valve operating system as claimed in claim 7 wherein:

 the actuator comprises a piston movable in a cylinder;

30 the system comprises additionally a position transducer which produces a position signal indicative of the position of the piston; and

 the electronic controller uses the position signal to generate an error signal used in closed loop control of the actuator.

35

9. An electrically operated valve for controlling flow of hydraulic fluid substantially as hereinbefore described with reference to and as shown in the accompanying Figure 1.


5

10. An engine valve operating system substantially as hereinbefore described with reference to and as shown in the accompanying Figure 3.

10


: 379768

FIG. 1

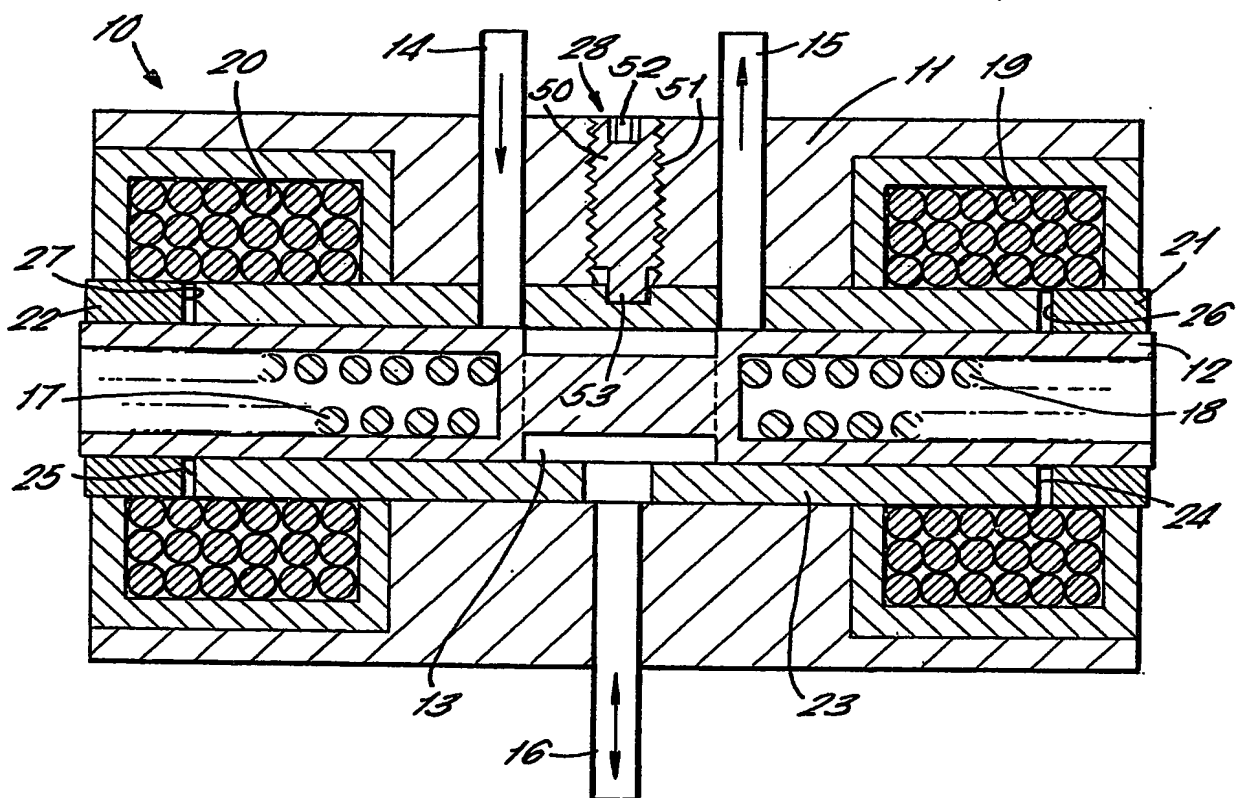

2/2

FIG. 2.

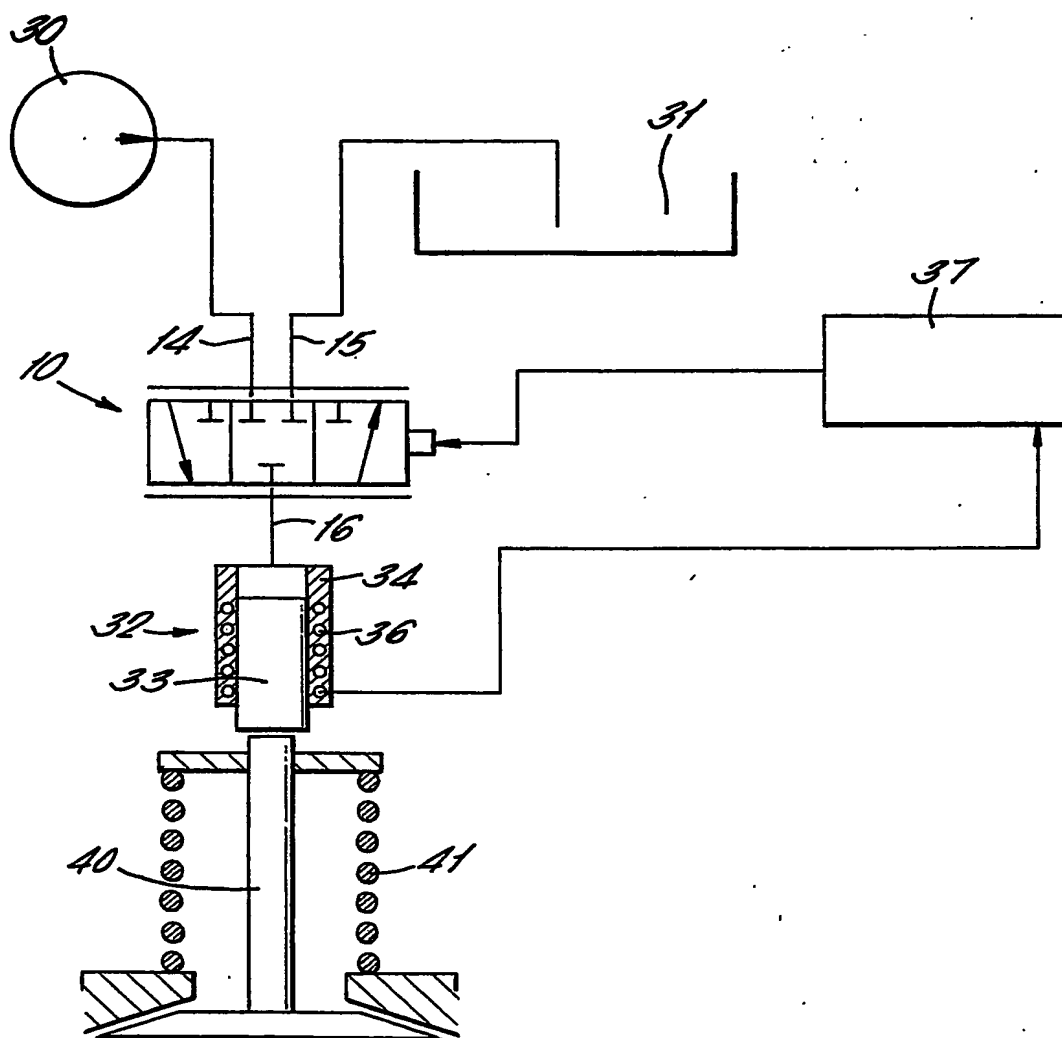

THE PATENT OFFICE
31 JUL 2003
Received in Patents
International Unit

THE PATENT OFFICE
G
30 JUL 2003
LONDON

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.